



Goodyear's multi-purpose radial traction tyre.

The Goodyear TL-3A+



SAND




EARTH AND MUD



AGGREGATES



ROCK

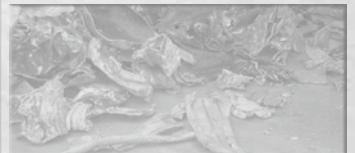

RECYCLING

ABRASION AND CUT RESISTANCE



HEAT RESISTANCE



TRACTION



STABILITY



SELF CLEANING



LONGEVITY



COMFORT



MADE TO FEEL GOOD.

Goodyear TL-3A+

Multi-purpose radial traction tyre

The TL-3A+ is a level 125 (L3/E3) tyre with outstanding traction properties.

It's multi-purpose nature enables it to be fitted to Wheel Loaders, Graders and Articulated Dump Trucks as well as other vehicles.



TL-3A+ benefits

- Outstanding versatility
- Excellent forward and lateral traction, complete with superior ride comfort
- Exceptional self-cleaning characteristics
- Non-directional tread design
- Wide footprint ensuring maximum contact and great stability

The choice of TL-3A+ depends on your specific operating conditions.
This choice is best made together with your local Goodyear OTR Sales representative.

Engineering Data

Dimension	Design Rim Width	ONSK (mm)	Inflated Dimensions		Loaded Tyre		Rolling Circumference (mm)
			Overall Width (mm)	Overall Diameter (mm)	Load Section & Growth (mm)	Static Loaded Radius (mm)	
17.5R25	14.00 / 1.5	36	454	1354		604 / 619	4038
20.5R25	17.00 / 2.0	40	545	1476			4449
23.5R25	19.50 / 2.5	42	620	1625			4898
26.5R25	22.00 / 3.0	46	681	1753			5284
29.5R25 Hi-Stability	25.00 / 3.5	47	788	1880			5667
750/65R25	24.00 / 3.0	46	775	1628			4878

Loads and Inflation

FOR LOADER/DOZER SERVICE AT 10KM/H REFERENCE SPEED

Dimension	Star Marking	Load Speed Index	Loads per Tyre in Kilos and Inflation Bar																			
			2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	
17.5R25	*	176A2	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100							
20.5R25	*	186A2	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500							
23.5R25	*	195A2	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150							
26.5R25	*	202A2	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000							
29.5R25 Hi-Stability	**	216A2	9000	10000	10900	11500	12500	13200	14000	14500	15500	16000	17000	17500	18000	19000	19500	20000	20600	21200	22400	
750/65R25	*	202A2	8250	9000	9750	10300	11200	12000	12500	13200	14000	14500	15000	15500	16500							

FOR GRADER SERVICE AT 40KM/H REFERENCE SPEED

Dimension	Star Marking	Load Speed Index	Loads per Tyre in Kilos and Inflation Bar																				
			2.00	2.25	2.50	2.75	3.00	3.25	3.50														
20.5R25	**	177B																					
23.5R25	**	185B																					6901

FOR ARTICULATED DUMP TRUCK AT 50KM/H REFERENCE SPEED

Dimension	Star Marking	Load Speed Index	Loads per Tyre in Kilos and Inflation Bar																			
			2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00							
17.5R25	**	167B											4125	4375	4625	4750	5000	5150				
20.5R25	**	177B	4000	4375	4750	5000	5450	5800	6000	6300	6700	6900	7300	7500	8000							
23.5R25	**	185B	5000	5450	6000	6300	6700	7300	7500	8000	8500	8750	9250	9500	10000							
26.5R25	**	193B	6300	6900	7500	8000	8500	9000	9500	10000	10600	10900	11500	12150	12500							
29.5R25 Hi-Stability	**	200B	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000							
750/65R25	**	190B	6000	6500	7100	7750	8250	8750	9250	9750	10000	10600	11250	11650	12200							